


Assembly instructions for Saddle Rack and Just Stuff it Bag:

First, insert the **stabilizer** to allow the cart to remain in the locked upright position when the weight of a saddle is on the saddle rack. The stabilizer is inserted into the base of the cart with the heavy steel tube in the back and the circular piece fitting over the cross bar on the base of the frame (1). Push firmly into place (2). If necessary, use a soft rubber mallet. Please see photos.

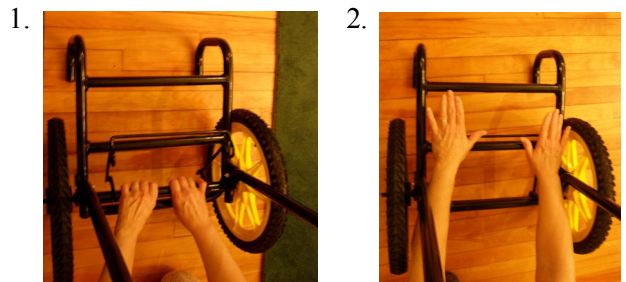

The Saddle Rack can be attached by simply holding it straight up in the air and attaching the hooks at the top of the rack to the top of the frame of the cart. Then, while holding the frame slowly drop it down into the horizontal position, so that the horizontal hooks then fall into place along each side of the cart.

The Stabilizer is also used for the **Just Stuff it bag**. (**Just** in case you overstuff)
The wire frame for the Just Stuff it is held in the upright position with the legs with curled feet to wrap around the frame facing back. (See photo 1). The frame slides over the top of the cart. Drop the front of the frame to the vertical position(1). Now the slide the frame forward so the “ears” or hooks at the top are under, yet in front of the top of the frame and hook the “ears” to the top of the frame (1). Now, return the frame to its horizontal or upright position (2). The legs are stretched out on each side and pulled around to the front of the sides of the cart frame in order to lock into position. (See photos 3 & 4). Your frame is now ready to accept the Just Stuff it bag (5), which has Velcro tabs that wrap around the wire frame; 2 in the back, 2 in the front, and one on each side. There are also Velcro tabs that attach to each side of the vertical frame to the cart.

